



**CHARGING**

Charge your light fully before first use

1. Insert Exposure Lights charger cable.

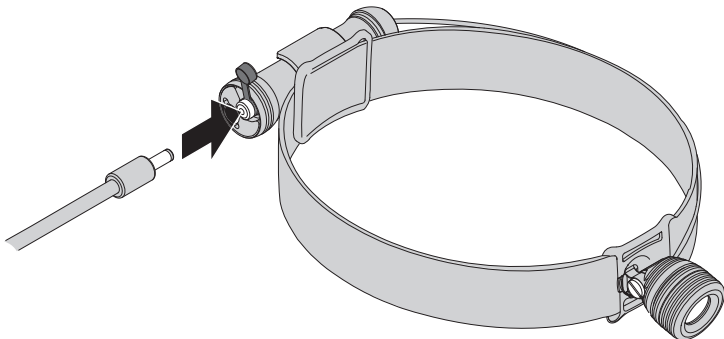

2. The bi-colour battery indicator (see graphic) will flash green whilst charging.
3. When the battery is fully charged the LED will turn solid green.
4. Charge time 3.5 hours from a 1500mA power source (up to 6 hours from a 500mA source).

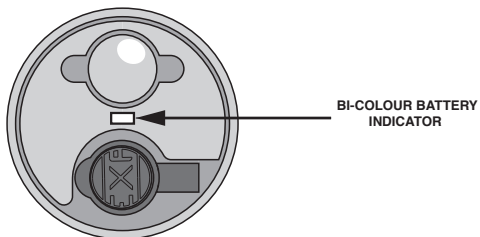

## LIGHT OPERATION

LIGHT OPERATION	ACTION
SWITCH ON	DOUBLE PRESS THE BUTTON
CHANGE MODE	SINGLE PRESS THE BUTTON
SWITCH OFF	PRESS AND HOLD THE BUTTON FOR 1 SECOND
FLASH	FROM ON PRESS AND HOLD THE BUTTON FOR 4 SECONDS
SOS	FROM ON PRESS AND HOLD THE BUTTON FOR 6 SECONDS
ACTIVATE SPT+	FROM OFF PRESS AND HOLD THE BUTTON, RELEASE DURING RAPID FLASH

## BATTERY FEEDBACK

**HT1000** – the bi-colour battery indicator is located on the power pack. It will indicate the remaining battery percentage whilst the light is in use and for 5 seconds after the light has been switched off.

BI-COLOUR BATTERY INDICATOR	BATTERY %
GREEN	100 - 85
GREEN PULSE	85 - 70
AMBER	70 - 55
AMBER PULSE	55 - 40
RED	40 - 25
RED PULSE	25 - 10
RED FLASH	10 - EMPTY

To view the battery status from OFF, press the button once, the front white LED will flash according to the battery status.

FLASH	BATTERY %
****	100-75
***	75-50
**	50-25
*	25-10
NO FLASH	10-0

### Low Voltage Flash

When your light's battery runs below 10% the front white light will triple flash **once**.

## OPTIMISED MODE SELECTOR (OMS)

OMS allows you to select the burn time combination tailored to your needs. Burn time and lumen output are directly proportional, if you double the burn time, you halve the lumen output.

HT 1000					
PGM	HIGH	MEDIUM	LOW	FLASH	SOS
1	1.5 hrs	6 hrs	12 hrs	30 hrs	9 hrs
2	3 hrs	18 hrs	36 hrs	30 hrs	9 hrs
3	1.5 hrs	-	12 hrs	30 hrs	9 hrs
4	12 hrs	-	48 hrs	30 hrs	9 hrs

TO SELECT A PROGRAM	FROM OFF PRESS AND HOLD THE BUTTON, THE LIGHT WILL EMIT A SET OF FLASHES. THE BI-COLOUR LED AND WHITE LED WILL THEN FLASH AT REGULAR INTERVALS
PROGRAM 1	RELEASE AFTER THE FIRST FLASH
PROGRAM 2	RELEASE AFTER THE SECOND FLASH
PROGRAM 3	RELEASE AFTER THE THIRD FLASH
PROGRAM 4	RELEASE AFTER THE FOURTH FLASH

## SMART PORT TECHNOLOGY+ (SPT+)

SPT+ allows the charge port to power ancillary Exposure accessories such as the RedEye. SPT+ can be used with Exposure Boost Cables to act as a power bank to charge your USB devices.

SPT+ will automatically activate when the light is on.

To activate SPT+ press and hold the function button, releasing when it rapid flashes.

To deactivate SPT+ simply turn the light on and off again.

## WARNING

⚠ Exposure Lights are very powerful lighting systems, please take care when operating. Do not look directly into the light or shine directly at others.

Exposure Lights / Ultimate Sports Engineering Ltd. accept no liability for any injuries or other damages arising from the use of their product in any circumstances.

**NOTE:** Patents apply.

## WARRANTY & SERVICE

***Please do not send any products back to us without contacting our service team first to discuss your issue and for a valid returns number.***

All our lights come with a 2 year warranty.

If you have a servicing or technical question you can contact us using the information below. If you return your light for repair, no work will be carried out until you have been contacted with the cost for the repair. If you are outside of the UK it would be quicker in the first instance to contact your local distributor.

+44 (0)1798 839300

service@use.group

