


FBP1	1 kg	ABC Dry Powder	Fire Rating	5A / 34B
FBP2	2 kg	ABC Dry Powder	Fire Rating	13A / 70B



-  Accredited to EN3 by BSI and Kitemarked
-  Manufacturer's 5 year warranty
-  Stored pressure - Easy low cost maintenance
-  Safe for use on electrical equipment
-  Suitable for A,B & C class fires
-  Brass valve - Easy to read pressure gauge
-  Controlled discharge
-  Powder coated, steel wire bracket

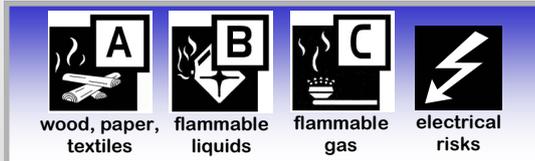

Products Kitemarked and Certified by DNV to MED "Ships Wheel" - meets the recommendations of the Royal Yachting Association and the requirements of the environmental Authority / British Waterways Board Joint Boat Safety Scheme.

Ideal for use in vehicles, caravans, boats, agricultural machinery, farms, garages, in the home, offices, and for a wide range of industrial and commercial applications.

Refilling/Serviceing: Should be carried out annually to BS 5306 Part 3, 2009. After complete or partial use the extinguisher should be refilled to BS 6643 Part 1, 1985. Both refilling and servicing to be carried out by a competent person. Spares available on request.

Model	FBP1	FBP2	
Capacity	1 kg	2 kg	
Total Weight	2.12 kg	3.65 kg	
Total Height	364 mm	380 mm	
Total Width (including bracket)	130 mm	140 mm	
Working Temp.	-30° to +60°C	-30° to +60°C	
Discharge Time	7 secs	15 secs	
Discharge Range	4 m	5 m	
Operating Pressure	14 bar @ 20°C	14 bar @ 20°C	
Minimum Burst Pressure	55 bar	55 bar	
Packing Specification	FBP1 Multipack	FBP2 Single Pack	FBP2 Multipack
Qty Per Carton	8	1	6
Carton Dimensions	37x37x28 cm	46x12x12 cm	42.5 x 37 x 29 cm
Carton Volume	0.038 m ³	0.007 m ³	0.046 m ³
Carton Weight	18.1 kg	3.78 kg	23 kg
Qty Extinguishers per Pallet	320 (40 Cartons)	200	240 (40 Cartons)
Pallet Dimensions	120x100x164 cm	120x100x136 cm	120x100x184 cm
Pallet Volume	1.97 m ³	1.632 m ³	2.208 m ³
Pallet Gross Weight	746 kg	778 kg	940 kg

