

Double Switch and Electronic Control Unit

Created for JOY, to allow the motor to invert the direction of rotation by switching UP or DOWN to consent the mooring and the shipping. However the double switch can be apply in any other application to start a double rotation motor as Anchor Windlass, winch o other.


The product allow to:

- command JOY in pulling and pushing version




DIMENSIONS

ELECTRONIC BOX CONTROL

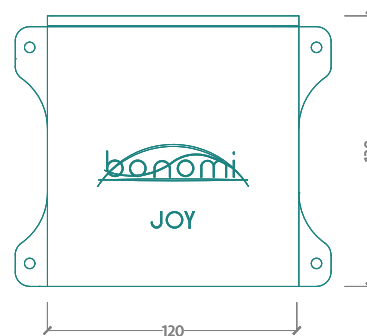


FRONT SIDE

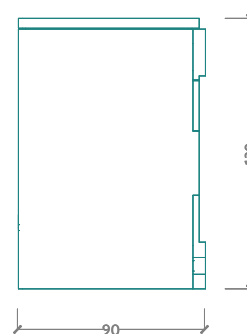


LATERAL SIDE

DOUBLE SWITCH

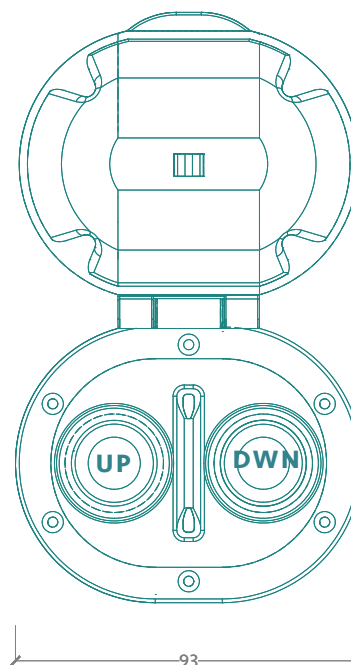

PLANT

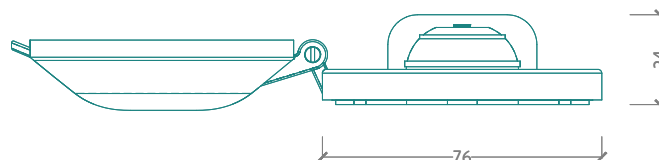

FRONT SIDE

TECHNICAL DATA

Model	B60C124V / B60C124V	
Volt DC in	12-24	
Maximum volt	36	
Material Switch	AISI 316 L	
Material Electric Box	Plastic	
Model B40C124V Motor Protection Breacker	A	40 (apply to B1A241H and B2A243H)
Model B60C124V Motor Protection Breacker	A	60 (apply to B3A121H and B4A123H)
Switch wire length	3 m	
Electronic Box Cable Lengh m	3 m	
Electronic Box Dimension	120 x 130 x 90 mm	
Protection	IP67	
Weight tot. kg	3 kg	
Control Box (only) maximum Current absorbed	A	4
Double Deck Switch	1	