


# Marlow®

## DATASHEET

### MARLOWBRAID

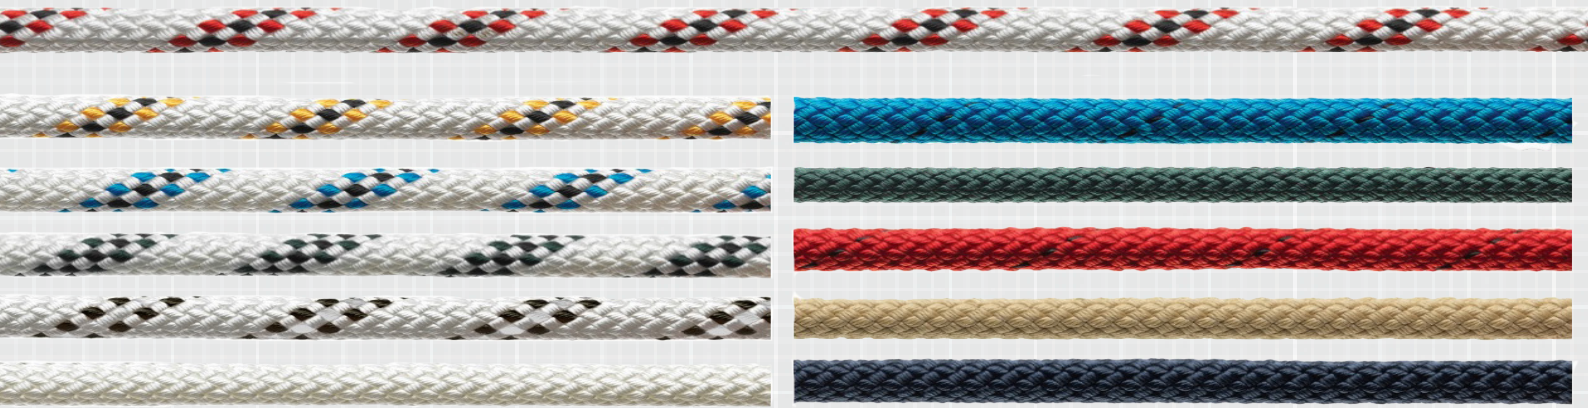

#### CONSTRUCTION

**MATERIAL CORE:**

High Tenacity Polyester

**MATERIAL COVER:**

High Tenacity Polyester

**CORE CONSTRUCTION:**

Long lay 3 Strand

**COVER CONSTRUCTION:**

16 Plait Braided

#### PROPERTIES

**LOW STRETCH**

**HIGH STRENGTH:**

Good general purpose line

**GOOD UV RESISTANCE:**

Durable

#### PERFORMANCE

DIAMETER		CIRCUMFERENCE		MASS		AVERAGE STRENGTH			MIN STRENGTH		
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN		
6	7/32	27	2.01	986	1982	8.8	829	1824	8.1		
8	5/16	45	3.02	1580	3828	17.1	1601	3522	15.7		
9	3/8	55	3.69	2270	4994	22.3	1990	4378	19.5		
10	13/32	73	4.90	2850	6270	28.0	2622	5768	25.7		
12	1/2	100	6.71	4450	9790	43.7	4094	9007	40.2		
14	9/16	145	9.72	5460	12012	53.6	5023	11051	49.3		
16	5/8	190	12.74	7420	16324	72.8	6650	14630	65.2		
18	3/4	235	15.76	10200	22418	100.0	9375	20625	92.0		
20	13/16	285	19.11	113	24948	111.2	10433	22952	102.3		
24	15/16	420	28.17	14000	30800	137.3	12600	27720	123.6		

Marlow Ropes Ltd  
Ropemaker Park  
Hailsham  
East Sussex, BN27 3GU  
England

Marlow Ropes, Inc.  
Cordage Business Park  
Plymouth  
MA 02360  
USA

www.marlowropes.com  
UK: +44 (0) 1323 444 444  
sales@marlowropes.com  
US: +1 508 830 444  
salesusa@marlowropes.com

#### Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.



Certification Number 315

ISO 9001