




Green Pin® Fishing Bow Shackle G-4169


With Square Sunken Headed Screw Pin

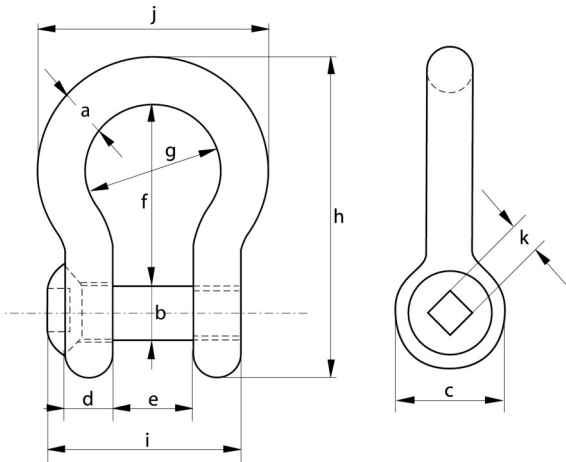

- Material** Bow and pin high tensile steel, Grade 6, quenched and tempered
- Safety Factor** MBL equals 6 x WLL
- Standard** EN 13889 and meets performance requirements of US Fed Spec. RR-C-271, Grade A
- Finish** Hot dipped galvanised
- Certification** As standard; EC Declaration of Conformity Upon request; 2.1, 2.2, 3.1, MTC^a, CE,
- Note** Key for unscrewing the pin must be ordered separately.

WLL	Diameter Bow	Diameter Pin	Diameter Eye	Width Eye	Width Inside	Length Inside	Width Bow	Length	Length Bolt	Width	Size Hole	Product Code	Weight Each
t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm		kg
2	13.5	16	34	13	22	51	32	89	51	58	11	13901	0.31
3.25	16	19	40	16	27	64	43	110	63	75	11	13902	0.56
4.75	19	22	46	19	31	76	51	129	74	89	11	13903	0.98
6.5	22	25	52	22	36	83	58	144	85	102	13	13904	1.46
8.5	25	28	59	25	43	95	68	164	99	118	13	13905	2.18
9.5	28	32	66	28	47	108	75	185	110	131	17	13906	3.06
12	32	35	72	32	51	115	83	201	122	147	17	13907	4.24
13.5	35	38	80	35	57	133	92	227	135	162	17	13908	5.59
17	38	42	88	38	60	146	99	249	145	175	17	13909	7.37

Key for Sunken Hole Shackle



Shackle Size	Product Code
t	
2 - 4.75	13901
6.5 - 8.5	13902
9.5 - 17	13903