


**VR2C Right Hand
Regatta Thread Terminal**

Technical Data
Forging material : AISI316 - DIN 1.4401
Surface treatment : "M.F." (Matte finished)

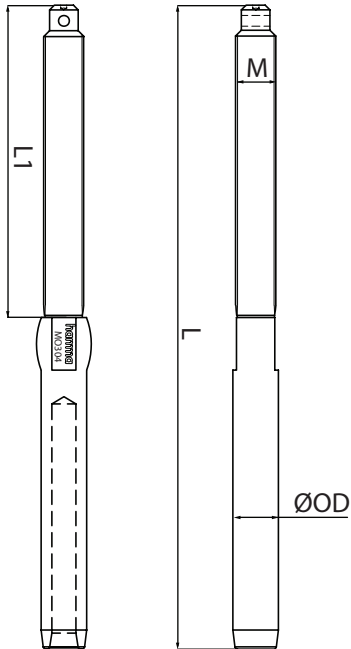

Right hand thread

RH/VR2C Code	SIZE (for cable)	L (mm)	L1 (mm)	M (Thread)	OD (mm)	MBL* (kgf)
VR2C-0003-0104	3	106	59	1/4"-28UNF	6.3	1,550
VR2C-0004-0104	4	120	59	1/4"-28UNF	7.5	1,550
VR2C-0004-0516	4	130	69	5/16"-24UNF	7.5	2,400
VR2C-0005-0516	5	148	69	5/16"-24UNF	9	2,400
VR2C-0005-0308	5	160	80	3/8"-24UNF	9	3,600
VR2C-0006-0308	6	170	80	3/8"-24UNF	12.5	3,600
VR2C-0006-0716	6	190	94	7/16"-20UNF	12.5	5,000
VR2C-0007-0716	7	200	94	7/16"-20UNF	14.3	5,000
VR2C-0006-0102	6	190	98	1/2"-20UNF	12.5	6,800
VR2C-0007-0102	7	202	98	1/2"-20UNF	14.3	6,800
VR2C-0008-0102	8	216	98	1/2"-20UNF	16.1	6,800
VR2C-0008-0508	8	234	117	5/8"-48UNF	16.1	10,900
VR2C-0009-0508	9	248	117	5/8"-18UNF	17.8	10,900
VR2C-0010-0508	10	260	117	5/8"-18UNF	17.8	10,900
VR2C-0010-0304	10	278	135	3/4"-16UNF	17.8	15,900
VR2C-0011-0304	11	295	135	3/4"-16UNF	19.8	15,900
VR2C-0012-0304	12	305	135	3/4"-16UNF	21.4	15,900
VR2C-0012-0708	12	320	149	7/8"-14UNF	21.4	21,500
VR2C-0014-0708	14	345	149	7/8"-14UNF	25	21,500
VR2C-0016-1000	16	390	168	1"-12UNF	28.1	28,300
VR2C-0108-0104	1/8"	106	59	1/4"-28UNF	6.3	1,550
VR2C-0532-0104	5/32	106	59	1/4"-28UNF	6.3	1,550
VR2C-0532-0516	5/32"	130	69	5/16"-24UNF	7.5	2,400
VR2C-0316-0516	3/16"	148	69	5/16"-24UNF	9	2,400
VR2C-0316-0308	3/16"	160	80	3/8"-24UNF	9	3,600
VR2C-0732-0308	7/32"	160	80	3/8"-24UNF	9	3,600
VR2C-0104-0716	1/4"	170	80	3/8"-24UNF	12.5	5,000
VR2C-0104-0102	1/4"	194	98	1/2"-20UNF	12.5	6,800
VR2C-0932-0102	9/32"	205	98	1/2"-20UNF	14.3	6,800
VR2C-0516-0102	5/16"	216	98	1/2"-20UNF	16.1	6,800
VR2C-0516-0508	5/16"	234	117	5/8"-48UNF	16.1	10,800
VR2C-0308-0508	3/8"	255	117	5/8"-18UNF	17.8	10,800
VR2C-0716-0304	7/16"	295	135	3/4"-16UNF	19.8	15,900
VR2C-0102-0708	1/2"	323	149	7/8"-14UNF	21.4	21,500
VR2C-0102-0708	5/8"	390	168	1"-12UNF	28.1	28,300